

GIO★-FLEX

GIO-FLEX UR PU CAD-CUT Heat Transfer Film

This is made with a thin and soft polyurethane film for light weight and soft touch.

- Recommended Fabric : Cotton, Polyester, Cotton/Polyester Blends, Lycra.




APPLICATION INSTRUCTIONS


1. Cut in mirror image through adhesive layer (dull side) to the PET carrier.
2. Weed the excessive material and lay the cut-design on the fabric.
3. Heat Press at **150°C for 8 seconds** and always **warm peel**.




Film

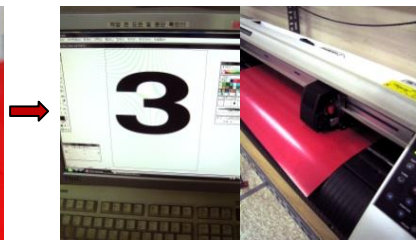

Design & Cut



Weed



Heat Apply

CARE INSTRUCTIONS FOR THE FINISHED PRODUCT



- **Washing**

- Washer : Standard Household Washing Machine
Temperature : 60°C
Detergent : Standard Household Detergent
Setting : Colored Clothing without Pre-wash

Maximum washing time on highest temperature not to exceed 12 minutes.
Maximum total washing time not to exceed 50 minutes.
Test fabric for dye migration.

- **Bleaching**

Not Recommended

- **Drying**

Tumble Dry Low



to LIST

GIO-FLEX

➤ **Ironing**

Do not use steam, use a cool or warm temperature setting, avoid direct contact of the design, use a press cloth.

COLOR AVAILABILITY

Normal Color



Neon Color



SPECIFICATION

Standard Width	Roll Length	Q'ty / Carton	Weight / Carton	Volume / Carton
510 mm	50 MTS	50 MTS	8.5 KGS	0.013 CBM
510 mm	25 MTS	50 MTS	8.0 KGS	0.020 CBM
1,020 mm	25 MTS	25 MTS	9.0 KGS	0.028 CBM

** Thickness : 60~70 Micron

STORAGE

- Keep away from the direct sunlight, hot and humid place.
- Use the film within 2 years from the date of the lot number (production date).

GIOLITE LUMIAN Co., LTD

RM408, Woolim E Biz Center #1, 170-5,
 Guro-Dong, Guro-Gu, Seoul, KOREA
 Tel: +82-2-869-1988(Rep.) Fax: +82-2-869-7711
 email: giolite@giolite.com
 Website: www.giolite.com



to LIST